


The Portable Scene Light series continues to grow - the original model features a 72" extension pole and the Portable Scene Light EXT features an 84" extension pole. Rapidly deployed and easily stowed, they feature a narrow footprint that lets you bring this light almost anywhere from wide open places to tight, confined spaces.

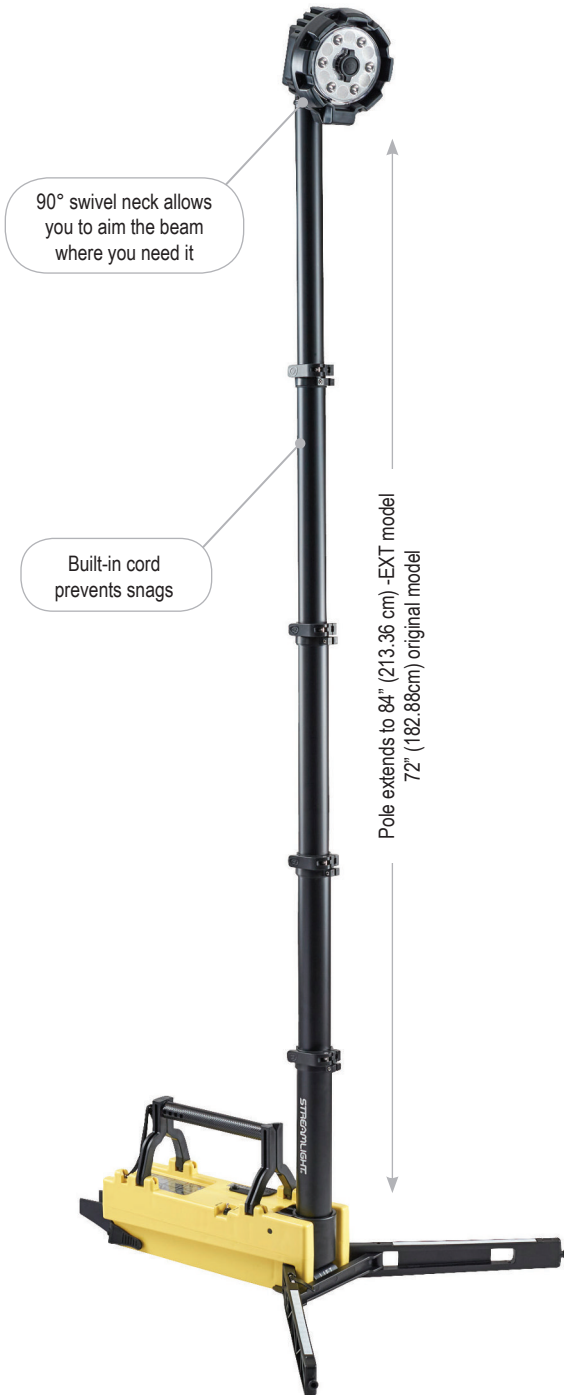

90° swivel neck allows you to aim the beam where you need it

Built-in cord prevents snags

Pole extends to 84" (213.36 cm) -EXT model  
72" (182.88cm) original model

Stabilization legs provide balance on uneven surfaces; fully deploy and lock in less than 30 seconds

**Portable Scene Light EXT**  
packs to a compact size  
(25.5 in.; 64.8 cm) for easy storage



**Portable Scene Light**  
packs to a compact size  
(22 in.; 55.88 cm) for easy storage



Selectable diffuser settings for two beam widths  
Works with all three modes



Six LEDs within wide pattern parabolic reflectors produce a smooth flood pattern

3 levels of lighting:

- High: 5,300 lumens; 410m beam; runs 4 hours
- Medium: 2,500 lumens; 292m beam; runs 9 hours
- Low: 1,300 lumens; 215m beam; runs 18 hours

Indefinite run time with AC/DC power cord

Sealed lead acid batteries charge in 10 hours

Batteries will continue to charge while operating directly from a dedicated AC or DC power source - includes 10ft (3m) DC power cord

High-impact thermoplastic housing; weatherproof construction

IP67 rated; dust-tight and waterproof to 1 meter for 30 minutes

Designed to resist 40mph wind continuous in all directions with head fully extended

Portable Scene Light - 25 lbs. (11.33kg)

Portable Scene Light EXT- 25.5 lbs. (11.6kg)

Both are easy to carry to work area, and the weight helps provide stabilization on uneven surfaces

Limited lifetime warranty

Visit [streamlight.com](http://streamlight.com) for full warranty information

See reverse for item numbers

<b>PORTABLE SCENE LIGHT</b>	<b>ITEM#</b>
Portable Scene Light with 120V AC/12V DC shoulder strap	#45670
Portable Scene Light with 230V AC/12V DC shoulder strap	#45671
Portable Scene Light with 240V AC/12V DC shoulder strap	#45672
Portable Scene Light with 100V AC/12V DC shoulder strap	#45673
Portable Scene Light with 240V (AUS/NZ) AC/12V DC shoulder strap	#45674
<b>PORTABLE SCENE LIGHT EXT</b>	<b>ITEM#</b>
Portable Scene Light EXT - 120V AC/12V DC, shoulder strap	#45680
Portable Scene Light EXT - 230V AC/12V DC, shoulder strap	#45681
Portable Scene Light EXT - 240V AC/12V DC, shoulder strap	#45682
Portable Scene Light EXT - 100V AC/12V DC, shoulder strap	#45683
Portable Scene Light EXT - 240V (AUS/NZ) AC/12V DC, shoulder strap	#45684





PORTABLE SCENE LIGHT or PORTABLE SCENE LIGHT EXT
RECHARGEABLE HIGH LUMEN FLOOD LIGHT

MARKET

APPLICATIONS: Fire & Rescue, Military, Utilities, Law Enforcement, Industrial Safety, Construction, Emergency Medical Services, Sporting Goods.

DESCRIPTION: The Portable Scene Light is an industrial-duty, rechargeable, completely portable high lumen flood light that can be fully deployed in less than 30 seconds. It uses six (6) LEDs and wide pattern reflectors to produce a uniform flood pattern with two (2) selectable beam widths and three (3) light output intensities. The Portable Scene Light's telescoping pole and rotating head extend to an overall height of 72 inches or 84 inches for the EXT version. Onboard stabilizing legs can be deployed for high wind or uneven terrain environments. System ships with a heavy duty shoulder strap, AC charger and 12VDC cord. Ideal for field maintenance, inspection of construction sites and remote equipment, military operations and general scene lighting.

CASE MATERIAL: High-impact thermoplastic housing, sealed. Available in International Safety Yellow.

DIMENSIONS: Body Width: 6.5 in. (16.5 cm) Overall Height: 11 in. (27.9 cm) Head Diameter: 6.7 in. (17 cm)
(RETRACTED POSITION) Portable Scene Light: Length: 22.5 in. (57.2 cm)
Portable Scene Light EXT: Length: 25.5 in. (64.8 cm)

WEIGHT: Portable Scene Light: 25 lbs (11.3 kg) with batteries (included in purchase).
Portable Scene Light EXT: 25.5 lbs (11.6 kg) with batteries (included in purchase).

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE: Six (6) high power white LEDs, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See chart. Six (6) wide pattern parabolic reflectors produce a smooth pattern. Selectable diffuser setting for two (2) beam widths. Optimized electronics provide fully regulated intensity; three (3) selectable light output intensities.

ON/OFF: Toggle switch allows operation from internal battery or continuous operation from external 12VDC or AC power source.

RUN TIME: See chart for battery operated run time. All run time claims to 10% output level. Red low battery warning indicator.
All models include an AC power supply and 10 foot 12VDC power cord for continuous operation while simultaneously charging batteries.

BATTERY: Zero-maintenance 12V, 14.0Ah sealed lead acid battery rechargeable up to 500 times. Red and green LEDs provide charge status feedback. 10 hour charge to 90% battery capacity with continuous trickle charge to maximize battery capacity.
Scene Light battery will continue to charge while operating directly from an external power source when using the 12VDC cord or AC charger.

FEATURES: LED technology and circuit to provide regulated light output throughout battery life.
IP67 rated; dust-tight and waterproof to 1 meter for 30 minutes.
Designed to resist 40mph wind continuous in all directions with head fully extended.
Serialized for positive identification.

APPROVALS: IP67 tested



CEC compliant



WARRANTY: Streamlight's Limited Lifetime Warranty.

OPTIONAL ACCESSORIES: 100VAC, 230VAC or 240VAC power cords.
12VDC (automobile) charger cord.
Quick release shoulder/waist strap.

Table with 4 columns: Intensity (HIGH, MEDIUM, LOW) and 4 rows: LUMENS, RUNTIME, DISTANCE, CANDELA. Values include 5,300, 2,500, 1,300 lumens; 4h, 9h, 18h runtime; 410m, 292m, 215m distance; 42,000, 21,300, 11,600 candela.