



2AA PROPOLYMER® HAZ-LO® ALKALINE BATTERY-POWERED FLASHLIGHT



Material/Lens Housing made from impact resistant engineering polymer. Facecap: Impact resistant engineering polymer overmolded onto polycarbonate lens. Available in yellow and black.

Dims/Weight Length: 6.40 in. (16.26 cm) Major Diameter: 1.32 in. (3.35 cm) Body Diameter: 0.89 in. (2.26 cm) 3.6 oz (100 grams) with batteries

Light Source/Output White LED technology, impervious to shock with a 50,000 hour lifetime. 65 lumens; 2,300 candela; 96m beam distance; runs 24 hours

Switch Push-button tail switch. One handed momentary or constant “on” operation

Battery Two “AA” alkaline batteries (included)

Features

- Sealed construction
- IPX7 rated design; waterproof to 1m for 30 minutes
- 1m impact resistance tested
- Push button tail switch for momentary and constant on operation
- Features wrist lanyard connection and integrated pocket clip

Approvals C-SGS-US Class I, II, Division 1, Groups A, B, C, D, E, F, G; Class III; CL I, ZN 0, IIC; T-Class: T4 (approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)

MSHA Permissible Flashlight. Approval No. 20-A140002-0. Tested for Intrinsic Safety in Methane-Air mixtures only. (approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)
Most models meet applicable European Community Directives

Warranty Streamlight warrants this product to be free of defects for a lifetime of use except for batteries and bulbs, abuse and normal wear. We will repair, replace or refund the purchase price of this product should we determine it to be defective. This limited lifetime warranty also excludes rechargeable batteries, chargers, switches and electronics which have a 2 year warranty with proof of purchase. THIS IS THE ONLY WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES ARE EXPRESSLY DISCLAIMED EXCEPT WHERE SUCH LIMITATION IS PROHIBITED BY LAW. You may have other specific legal rights which vary by jurisdiction. Visit streamlight.com for full warranty information.

Item	UPC	Part #
2AA ProPolymer HAZ-LO with alkaline batteries – Yellow	080926-67101-0	67101
2AA ProPolymer HAZ-LO with alkaline batteries – Black	080926-67100-3	67100



Adheres to side of hard hat



Hard hat and flashlight not included

68089
Poly Mount Kit - universal mounting via slot attachment or self-adhesive mount

Includes adapters for mounting:
4AA ProPolymax®
3AA ProPolymer® HAZ-LO®
2AA ProPolymer® Series or the PolyTac® LED Series



Clips onto hard hats



Clips onto hard hats or adheres to side of hard hat



99075
Helmet Strap
Hard hat and flashlight not included



85116

85117

85115

74039



74903

74904

74913



85905

Item	UPC	Part #
Polymount Kit	080926-68089-0	68089
Rubber Helmet Band	080926-99075-3	99075
Nylon holster	080926-85905-0	85905
Safety Wand	080926-74903-0	74903
Safety Wand - Yellow	080926-74904-7	74904
Safety Wand - Glow in the Dark	080926-74913-9	74913
Flip Filter - Red	080926-85115-3	85115
Flip Filter - Blue	080926-85116-0	85116
Flip Filter - Green	080926-85117-7	85117
Flip Filter - I/R	080926-74039-6	74039

2AA PROPOLYMER® HAZ-LO® INTRINSICALLY SAFE ALKALINE FLASHLIGHT

MARKET

APPLICATIONS: Industrial, Occupational Safety, Fire & Rescue, Sporting Goods, Law Enforcement, Security, Hardware/Tool, Consumer

DESCRIPTION: The 2AA ProPolymer® HAZ-LO® is an extremely durable, waterproof alkaline battery-powered intrinsically safe flashlight. This light offers a push-button tailswitch for momentary on/off operation. Div 1 model available in black or yellow. ATEX model available in orange and yellow.

CASE MATERIAL: Body: Impact resistant Engineering polymer.
Facecap: Impact resistant Engineering polymer overmolded onto polycarbonate lens.

DIMENSIONS: Length: 6.40 in. (16.26 cm) Major Diameter: 1.32 in. (3.35 cm) Body Diameter: 0.89 in. (2.26 cm)

WEIGHT: 3.6 oz (100 grams) with batteries (included in purchase).

LENS: Unbreakable polycarbonate with scratch-resistant coating.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: 65 lumens, 2,300 candela peak beam intensity and 96 meter beam distance.
Smooth parabolic reflector produces a tight beam with optimal peripheral illumination.



RUN TIME:  24 hours to 10% of initial lumen output. See performance curve.

ON/OFF: Push button tail switch provides one handed momentary or constant “on” operation.

BATTERIES: Two (2) 1.5V alkaline batteries.

FEATURES:


C4® LED technology.
Sealed construction.
Intrinsically safe.
IPX7 rated design; waterproof to 1 meter for 30 minutes.
1 meter impact resistance tested.
Push button tailswitch for momentary and constant on operation.
Integrated clip.

APPROVALS*:


Class I, II, Division 1, Groups A, B, C, D, E, F, G; Class III; CL I, ZN 0, IIC; T-Class: T4
(approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)



Permissible Flashlight. Approval No. 20-A140002-0.

Tested for Intrinsic Safety in Methane-Air mixtures only.

(approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)



II 1G Ex ia IIC T3/T4 Ga (approved for use with Duracell MN1500 (T3) and Rayovac NO.815 (T4))
BASEEFA 14ATEX0072; IECEx BAS 14.0034



Ex ia IIC T3/T4 Ga (approved for use with Duracell MN1500 (T3) and Rayovac NO.815 (T4))
DNV 15.0170X

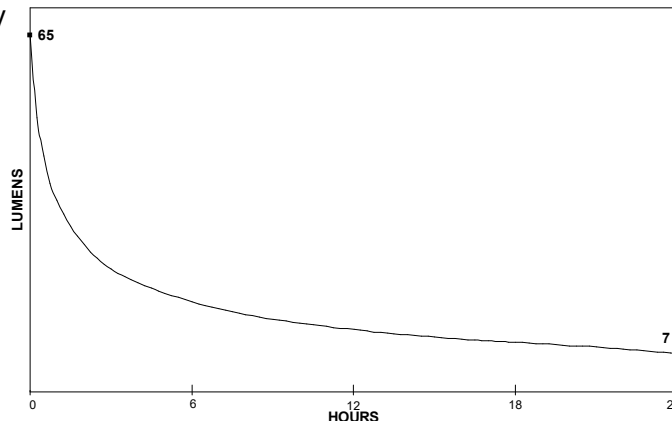


Meets applicable European Community Directives.

WARRANTY: Streamlight's Limited Lifetime Warranty

OPTIONAL

ACCESSORIES: Helmet Mounts, Safety Wands, Holster

PERFORMANCE CURVE


* See product for specific ratings.

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 05/08/2014

Revised: 05/04/2016 Rev: 4